Laminated Dock Bumpers


B610-63-A

Loading Dock Supply 1-800-741-1258 www.loadingdocksupply.com

Loading Dock Equipment Loading Dock Bumpers

Features Tough plies of truck tire material virtually eliminates chipping or abraision, unlike molded rubber, extruded rubber, conveyor belting or wood plank bumpers. Attractive deep black color enhances a neat, professional architectural look. Manufactured under pressure exceeding 1,500 lbs. to absorb over 80% of impact force. Anchor bolts are protected by

at least 3" of rubber to prevent damage.

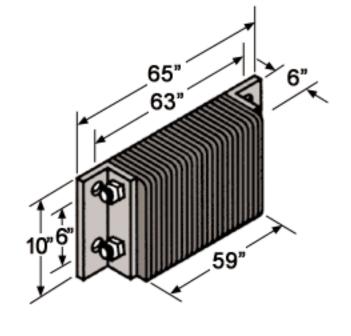

Material/Thickness

Fabric reinforced rubber pads cut from selected recycled truck tires. Rubber pads laminated between structural steel angles and secured with 3/4" steel tie rods.

Installation

Structural mounting angles permit welded installations or provide bolting through steel

Extra Length bumpers must be supported in the center. You will need to specify one of these anchorage devices when placing your order.

AD-1
Anchor to face of dock

AD-3
Anchor to face and floor of dock

AD-3
Anchor to face and floor of dock

AD-1
AD-2
Anchor to dock floor

AD-1
Weld to curb angle, anchor to dock face

Bumpers may be ordered with angles or flat plates at each er Use a flat plate for mounting bumper next to a dock leveler, o where the space is to tight to allow the use of angles. Note: When using the flat plate, it is welded to the dock.

