

BUMPERS

Extra Length Dock Bumpers

For total coverage on doors 10' and smaller, extra length dock bumpers offer protection from both your freight and the elements, making them an ideal choice for food handling and controlled access warehouses.

- American Manufactured
- Maintenance free
- Couple with dock seals for total protection
- · Seals in/out heat, cold, bugs, dust and debris
- Provides continuous protection across face of dock for applications where trucks back in at an angle
- Absorbs over 80% of truck impact and shock
- Available in lengths up to 123"
- Support your bumper with one of four options
- Flat plates available in place of end angles
- Galvanized Angles or Galvanized angles and carriage bolt option available.

Features

- Dock seal and bumper interact to totally seal the truck to the dock
- Provides continuous protection for truck, cargo, dock/shelter from wind, snow, heat, rain, and pests
- Custom lengths available
- Four styles of mounting tabs provide a superior mount for a variety of uses
- Tough plies of truck tires provide superior resistance to chipping or abrasion; unlike molded rubber, extruded rubber, conveyor belting or wood plank bumpers
- Attractive deep black color stimulates a neat, professional look for your loading dock
- Manufactured under pressure exceeding 1,500 lbs.
- Anchor bolts are protected by at least 3" of rubber to prevent damage

Specifications


- Resilient rubber material of bumpers shall be sourced from truck tires cut to uniform size pads and punched to receive 3/4" supporting rods
- All bumpers compressed under approximately 1,500 lbs of pressure, steel angles secured by 1/4" steel rods passing through tire sections
- The anchor leg of the angle extends a minimum of 3" beyond the rubber surface at either end and contains 13/16" anchor bolt holes as required (Anchor bolts supplied separately)
- Galvanized available upon request, surcharges apply

Installation


- Structural steel angles mechanically fastened or welded by 3/4" anchors to dock face
- Four anchorage device options for welded and anchored applications

Anchor Insert Styles


AD-1
For anchorage to dock face







AD-T
For anchorage to curb
angle and face



A: 1/4" x 3" x 7" Plate B: 1/4" x 3" x 3" Plate


C: 1/4" x 3" x 10" Plate

D: 1/4" x 2-1/2" x 3" Plate



DOCK BUMPERS



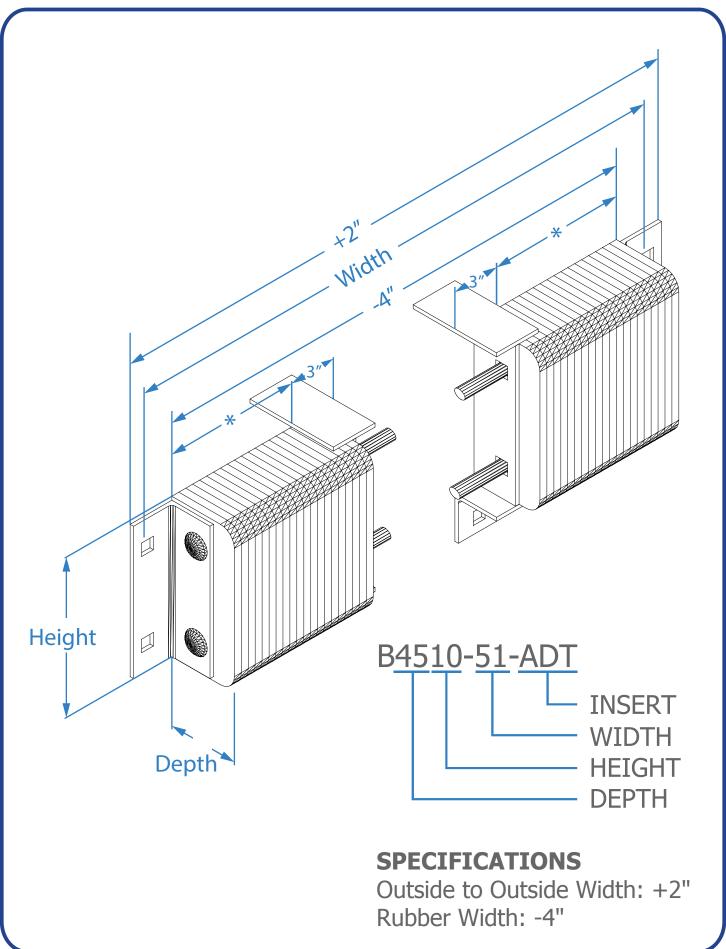

Phone:1800-741-1258 Fax:866-709-2802 www.loadingdocksupply.com

DOCK BUMPERS



Extra Length Dock Bumpers					
Model	Depth	Height	Width	AD	Weight Lbs
B4506-87-A*	4.5	6	87	2	98
B4506-99-A*	4.5	6	99	2	121
B4510-51-A*	4.5	10	51	1	101
B4510-63-A*	4.5	10	63	1	124
B4510-75-A*	4.5	10	75	2	147
B4510-87-A*	4.5	10	87	2	172
B4510-99-A*	4.5	10	99	2	193
B4510-111-A*	4.5	10	111	3	218
B4510-123-A*	4.5	10	123	3	238
B4512-51-A*	4.5	12	51	1	120
B4512-63-A*	4.5	12	63	2	148
B4512-75-A*	4.5	12	75	2	175
B4512-87-A*	4.5	12	87	3	202
B4512-99-A*	4.5	12	99	3	230
B4512-111-A*	4.5	12	111	4	258
B4512-123-A*	4.5	12	123	4	284
B610-51-A*	6	10	51	1	126
B610-63-A*	6	10	63	1	154
B610-75-A*	6	10	75	2	182
B610-87-A*	6	10	87	2	216
B610-99-A*	6	10	99	2	244
B610-111-A*	6	10	111	3	272
B610-123-A*	6	10	123	3	307
B612-51-A*	6	12	51	1	154
B612-63-A*	6	12	63	2	188
B612-75-A*	6	12	75	2	223
B612-87-A*	6	12	87	3	258
B612-99-A*	6	12	99	3	299
B612-111-A*	6	12	111	4	333
B612-123-A*	6	12	123	4	374

Additional AD's add \$15.50 each

Substitute standard angles on one side (P1) or both sides (P2) for weld applications

Phone:1800-741-1258 Fax:866-709-2802 www.loadingdocksupply.com